

# Van Gogh Wood



The iconic Van Gogh range showcases enduring American style and performance while capturing nature in its rawest form. These stunning looks are highlighted by a variety of effects, including distressed, limed and reclaimed processes in a hardwearing 48" x 7" plank.

A selection of these gluedown visuals are available in an additional rigid core construction, giving you the visuals you want in the construction you need.







Hygienic



Durable



Low maintenance

**Van Gogh Gluedown** requires familiar gluedown application methods for a secure fit. Choose our gluedown planks if you prefer to personalize your space with design strips or wish to have additional layout flexibility, in applications where sound transmission isn't a concern, or when you prefer the planks be permanently adhered to the subfloor.

**Van Gogh Rigid Core** can be installed over most existing imperfect subfloors with minimal preparation and no need for adhesive. Select rigid core in upper levels to reduce sound transfer by 22dB, over subfloors prone to moisture (up to 95% RH), and over uneven subfloors.

| Gluedown        |                              | Rigid Core      |
|-----------------|------------------------------|-----------------|
| 48" x 7"        | Plank Size                   | 48" x 7"        |
| 20mil           | Wear Layer                   | 20mil           |
| 3mm             | Thickness                    | 4.5mm           |
| Lifetime        | Residential Warranty         | Lifetime        |
| 15 years        | Commercial Warranty 15 years |                 |
| Begins with VGW | Product Code                 | Begins with SCB |



It's not just the floor you lay, but how you lay it that makes a lasting impression. We offer numerous pattern possibilities to make the most of your space. Add design strips and borders for a truly unique look.







### French Oak

VGW91T | VGW92T | VGW93T | VGW94T

Highlighted by rich, distinctive grains and vibrant colours, our French oaks add beautiful character with a touch of sophistication to your space.



### American Redwood

VGW99T | VGW100T | VGW101T


Redwoods are among the tallest and oldest trees in the world and grow along the forests on the Pacific coast, where they are exposed to saltwater air. Our design was developed from a reclaimed railroad tie made of American redwood and captures the aged beauty of the original plank.



### **Mexican Cypress**

VGW95T | VGW96T

Featuring some of the most detailed and unique designs in our Van Gogh range, our Mexican Cypress planks replicate burnt and limed finishes for a refined, sophisticated aesthetic.



### **Scottish Beech**

VGW97T | VGW98T | VGW102T

Our Scottish Beech planks showcase the rich, charred tones found in smoked wood flooring. The subtle, well-balanced colour variations provide a warming foundation for any décor.



### Classic

VG1-7 - VGW89T

Part of our original Van Gogh range, these planks include a variety of timeless designs, from traditional to rustic. They offer all the beauty and none of the maintenance hassles of real hardwood floors.



# Colours Available in Gluedown and Rigid Core




Tawny Oak **VGW9IT | SCB9I** 



Vintage Pine **VGW76T | SCB76** 

## Colours Available in Gluedown Only

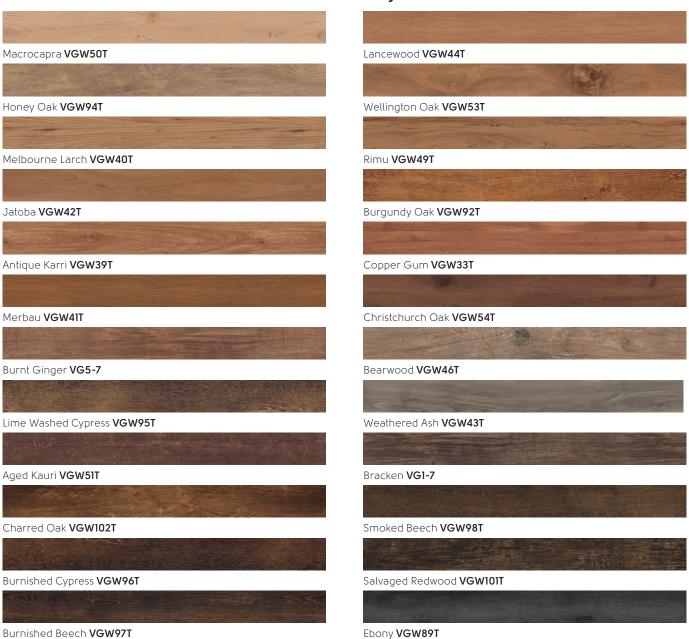

# Van Gogh Wood



48" x 7" (1219mm x 178mm)



Country Oak VGW81T | SCB81



Aged Redwood VGW100T\* | SCB100\*



Weathered Ash **VGW43T** 



Reclaimed Redwood VGW99T\* | SCB99\*



Tawny Oak VGW91T\* | SCB91\*



Ebony **VGW89T** 

<sup>\*</sup>Please note: as a feature of the design, these products incorporate high colour variation between individual planks.



Macrocapra **VGW50T** 



French Oak **VGW85T | SCB85** 



Reclaimed Maple **VGW71T | SCB71** 



Honey Oak **VGW94T**\*



Melbourne Larch **VGW40T** 



Bearwood **VGW46T** 

\*Please note: as a feature of the design, these products incorporate high colour variation between individual planks.



Antique Karri **VGW39T** 



Rimu **VGW49T** 



Classic Oak **VGW86T | SCB86** 



Copper Gum VGW33T



Burgundy Oak **VGW92T**\*



Wellington Oak **VGW53T**\*

\*Please note: as a feature of the design, these products incorporate high colour variation between individual planks.



Jatoba **VGW42T**\*



Lancewood **VGW44T**\*



Vintage Pine **VGW76T\* | SCB76\*** 



Hessian Oak VGW93T\* | SCB93\*



Burnt Ginger **VG5-7** 



Smoked Oak **VGW70T | SCB70** 

<sup>\*</sup>Please note: as a feature of the design, these products incorporate hgh colour variation between individual planks.



Merbau VGW41T\*



Christchurch Oak **VGW54T**\*



Lime Washed Cypress **VGW95T**\*



Bracken VG1-7



Aged Kauri **VGW51T** 



Smoked Beech **VGW98T**\*

<sup>\*</sup>Please note: as a feature of the design, these products incorporate high colour variation between individual planks.



Charred Oak VGW102T\*



Burnished Cypress VGW96T\*



Salvaged Redwood VGW101T\*



Burnished Beech VGW97T\*



# Floorstyle Floor Designer View a larger representation of each product in commercial spaces by using our interactive Floorstyle design tool. www.karndean.com/commercialfloorstyle

\*Please note: as a feature of the design, these products incorporate high colour variation between individual planks.



# Technical Specification

|                                 | Standard                                       | Gluedown Result   | Rigid Core Result   |
|---------------------------------|--|---|---|
| Thickness                       |  | 3.0 mm  | 4.5 mm  |
| Size*                           |  | 48" x 7"  | 48" x 7"  |
| Locking system**                |  |   | Click locking   |
| Wear layer                      |  | 20 mil (0.50 mm)  | 20 mil (0.50 mm)  |
| Box quantity                    |  | 35 sq.ft / 15 Planks  | 23.64 sq.ft / 10 Planks                                       |
| Surface treatment               |  | K-Guard+® PU coating  | K-Guard+® PU coating  |
| Warranty***                     | Commercial<br>Residential                      | 15 years<br>Lifetime  | 15 years<br>Lifetime  |
| Standards                       | ASTM F3261                                     |   | Pass: Resilient flooring with Rigid Polymeric Core            |
| Beveled edge                    |  | Micro   | Micro   |
| Classification                  | ASTM F1700                                     | Class III Type B  |   |
| Reaction to fire                | ASTM E648-06                                   | Class 1   | Class 1   |
| Smoke density                   | ASTM E662-06                                   | Pass (<450)   | Pass (<450)   |
| Flammability test               | FF 1-70; Federal Approval<br>ASTM D2859        | Pass  | Pass  |
| Slip resistance****             | ASTM D2047                                     | Pass (Dry 0.89)   | Pass (Dry 0.8)  |
| Staining resistance             | ASTM F925                                      | Pass  | Pass  |
| Heat fastness                   | ASTM F1514                                     |   | Pass  |
| Light fastness                  | ASTM F1515                                     | Pass △E = 3.3   | Pass  |
| Electrostatic propensity        | AATCC 134                                      |   | 1.1 kV  |
| Abrasion resistance             | ASTM D3884<br>ASTM D4060                       | 115000 cycles   | Pass 20000 cycles   |
| Dimensional stability           | ASTM F2199<br>ISO 23999                        | Pass<br>-0.002"/lin.ft  | Pass<br>-0.002"/lin.ft<br>Pass                                |
| Acoustic impact noise reduction | ASTM E2179-09                                  | $\triangle$ IIC = 6 dB  | ∆IIC = 22 dB  |
|                                 | ASTM E492-09                                   | IIC = 46 dB (6" slab<br>w/drop ceiling)   | IIC = 69 dB (6" slab<br>w/drop ceiling)                       |
|                                 |  | <pre>IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)</pre>                             | <pre>IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)</pre> |
|                                 |  | For settings that require additional noise r<br>Business Manager for our portfolio of aco |   |
| Indentation-residual            | ASTM F 1914                                    |   | Pass  |
| Static load                     | ASTM F970                                      | 1000 psi  | Pass 600 psi at 0.005"  |
| Flexibility                     | ASTM F137                                      | Pass  |   |
| Adhesive                        | Please refer to our installation instructions. |   |   |
| Recycling                       |  | Suitable  | Suitable  |
| Phthalate free                  |  | Yes   | Yes   |
|                                 |  |   |   |













- Exact size 48.03" x 7.09"
- Produced under Licence from Flooring Industries Subject to terms, please see our website. Full technical data is available on our
- websile.

  \*\*\*\* Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

### Colour and Pattern Reproduction

We are careful to make sure our brochures are accurate and printed to very high standards, but photography and printing cannot always create a perfect representation of our products. For this reason we strongly recommend that you look at a sample of any product you are considering before placing your order.

All of our products are inspired by things we have seen in the natural world. Just as variation in colour and detail is part of the unique beauty of natural materials, it is also a feature of many of our designs. This means that with some of our products you will see natural variation when your floor is laid. If in doubt, ask to see a larger sample of the product.



www.karndean.com KD5165USA |

Cover image: Lancewood **VGW44T** with DS07 10mm design strip

Karndean Designflooring Canada #3-3250 Harvester Road Burlington, Ontario L7N 3W9

Phone: 866-819-6825